

Description

Overhead transport system able to actuate the selective drawing of garment lots.

This patent application concerns an overhead transport system able to actuate the selective drawing of garment lots.

It is generally known that overhead transport systems able to move forward garments hung on hangers have been used for some time; accordingly, these systems basically have the capacity of handling and
5 drawing the hooks of the above-mentioned hangers.

However, these systems are not only used to make the garments move forward one by one; they also more and more often perform the function of sorting these garments in a predetermined order, thanks to their capacity of automatically creating selective garment lots and automatically
10 unloading the subsequent lots that have just been created.

More particularly, the creation of the said lots is made possible by systems equipped with a rotating threaded rail, in a horizontal position, on which appropriate switch devices gradually unload the garments (hung on
15 their hangers) for the purpose of forming every separate lot.

In this case, the hanger hooks that are supported by the said threaded rail are moved forward, precisely thanks to the rotatory motion of the rail, towards the unloading station; in this context, it is obvious that theoretically, every single hanger supported by the rail should rapidly be conveyed towards
20 the unloading station.

Yet considering the fact that the purpose of such a system is to create garment lots (and only afterwards to perform the contemporaneous unloading of each lot), it is easy to understand why the said threaded rail is supplied with a lever which, as long as the garments are accumulating in order to form
25 a lot, is in such a position as to interfere with the hanger hooks, obstructing their forward movement towards the unloading station.

More particularly, this lever which, when in its operational position, is

placed very near the said rotating rail, has the function of intercepting the lot's first garment's hanger hook; this first hanger is therefore not only unable to move forwards (although the threaded rail is still rotating), but it naturally also holds up all the hangers of the same lot's subsequent garments that, drawn forward by the rail itself, end up by accumulating tightly behind the first hanger.

Logically, as soon as the required lot formation is complete, the above-mentioned stop lever is removed, so that the whole lot can rapidly be conveyed to the unloading station.

10 In this connection, it is important to note that the necessity of using the said hook stop lever is linked to the fact that the threaded rail rotation can never be stopped, as it permanently performs a twofold function: on one hand it brings together the separate garments that will then be part of the same lot, and on the other hand it unloads a lot that has been created, while another lot
15 is simultaneously being created behind the stop lever.

In other versions of these traditional transport and sorting systems, the feature that enables the hangers to move forward and therefore the lots to be formed, in collaboration with the same stop lever, consists of a closed circuit chain which is in any case capable of making the hanger hooks which it
20 supports continuously move forward.

However, in both the versions described above, these traditional systems are disadvantaged by some considerable drawbacks with negative effects that appear precisely when the subsequent lots are being formed, in other words when the said hanger hook stop lever is in operational position.

25 Indeed, the gradually increasing number of hangers that accumulate behind the said stop lever – as a consequence of the drawing action due to the threaded rail or, alternatively, to the closed circuit chain – provokes an increasing resistance which is detrimental to the rotation of the threaded rail itself or to the forward closed circuit motion of the chain itself.

30 All this means a particularly important stress is put on the devices that are in charge of the rail rotation or the chain forward motion which, in order to take this stress without any risk, must possibly be of a much bigger size than

necessary.

Furthermore, this considerable stress put on the said systems naturally also requires a significant consumption of energy, particularly around those "peak" times that occur when the resistance to the forward motion of the systems themselves turns out to be greater because of the substantial
5 number of hangers tightly accumulated one against the other.

This critical evaluation of these prior art arrangements gave the impulse to design the system according to this invention, with which it is believed possible to form in an efficient way lots of garments hanging on
10 hangers without coming across the above-mentioned drawbacks: that is, without creating significant resistance to the forward motion of the system itself and without imposing a particularly high consumption of energy nor exposing the garments to the above-mentioned damaging pressure.

These goals have been achieved by equipping the system with a
15 basically box-shaped support rail, for the purpose of defining the trajectory, which is generally horizontal, of the line of the system itself used for the formation of the lots of garments hanging on the said hangers.

The feature used for moving the hangers forward is preferably represented by a special chain with links, that runs in a closed circuit, guided
20 and contained in the above-mentioned box-shaped support rail.

More precisely, this chain presents a regular alternation of links that are edgeways and links that are flat; this particularity creates, between two subsequent links situated edgeways, a kind of cradle formed by the link in-between, which is flat; this kind of cradle is useful for positioning and drawing
25 the hangers' hooks.

The idea on which this invention is based provides for the chain, while continuously moving forward in a closed circuit, to either be in the condition of interfering with the hangers' hooks (and therefore in the condition of actually drawing them), or in the condition of not interfering with them (and therefore
30 in the condition of not being able to move them forward).

Logically, the interference between the chain and the hangers is obstructed for the time necessary to form, on the above-mentioned system,

every requested lot; needless to say that without this interference, the hangers are going to keep a static position on the system itself.

But as soon as the lot is complete, the said chain is put in a position that enables it to interfere with the hooks of the hangers of the lot itself; these
5 hangers will therefore all undergo the drawing action of the chain itself, which conveys them towards an unloading station.

In order to selectively produce this interference between the hanger hooks and the chain that runs inside the system according to this invention, the chain has to vary the height of its own forward motion inside the said box-
10 shaped support rail.

More precisely, the chain is able to run alternately along a lower trajectory in which its links do not protrude enough from the support rail to interfere with the hooks of the hangers supported by the support structure itself, and along a higher trajectory in which its links protrude enough to
15 intercept the hooks of the hangers that have to be moved forward on the system itself.

Now, the variable height at which the chain moves forward is obtained by actually having this chain running between two appropriate liftable tracks, held one after the other in a suitable groove made on the whole length of the
20 support rail on the system in question.

The lifting or lowering of each of these tracks can be obtained simply by inflating or deflating a rubber tube placed just below each of them; accordingly, it can be said that each of these rubber tubes serves, in relation to the respective liftable track, as a proper thickness with a variable size.

25 It should also be noted that the various tracks situated in the system's support rail can be lifted as described above independently from one another; the interference between the conveying chain and the hangers can therefore occur selectively in various points on the system, according to the invention, where different lots are being created.

30 For major clarity the description of the invention continues with reference to the enclosed drawings, intended for purposes of illustration and not in a limiting sense, where:

- Figures 1 and 2 are respectively the axonometric representation and the view of a section of the support rail used on the system according to the invention, in the position taken when the drawing chain does not interfere with the hanger hooks;

- 5 - Figures 3 and 4 are similar to the previous figures, but they are here to show the system when the chain has to interfere with the hanger hooks.

With reference to the enclosed figures, the overhead transport system in question makes use of a longitudinal support rail (1) that is attached, by means of a horizontal protruding plate (1a), to the top of appropriate upright
10 posts fixed to the ground.

This support rail (1) has a box-shaped structure, due to the presence of two longitudinal grooves (2, 3) placed at two different heights and not communicating.

More in detail, the groove (2) that is placed above is at a higher height
15 and presents a "U"-shaped section; while the groove below (3) is at a lower height and is closed on both sides.

Thanks to its shape described above, the groove placed above (2) is able to hold a rubber tube (4) at the bottom, while the rest of its height is taken up exactly by a liftable modelled track (5) with a kind of saddle (5a)
20 below, which rests upon and links up perfectly with the circular profile of the said tube (4).

The opening of the said higher groove (2) is delimited by an opposed pair of modelled edges (2a) on the outside of which are applied corresponding longitudinal strips (6) made of a material with a low friction
25 coefficient and with an curved external profile; the two strips (6) therefore lead together to the creation of a support and sliding line for the hanger hooks (G) at the top of the support rail (1); this line has a central longitudinal slot (6a) consisting of the empty space existing between the two above-mentioned strips (6).

30 In particular, the curved profile of the said line has been designed to take into account the regular curving of the hanger hooks (G) in order to ensure that the hooks are naturally subject to a stable and balanced centring

above the line itself.

On the bottom of the lower groove (3) is placed a fixed track (3a), on the inside of which runs the lower branch of a particular closed circuit chain (7), whose higher branch runs through the above-mentioned liftable track (5).

5 As already mentioned, the said chain (7) consists of a regular alternation of links that are edgeways (7a) and links that are flat (7b).

Now the lower semicircumference of the different links set edgeways (7a) of the said chain (7) runs through an appropriate groove (5b) placed above the said liftable track (5), while the higher semicircumference of these
10 links runs through the above-mentioned longitudinal slot (6a) without protruding; whereas the flat links (7b), on the other hand, remain supported, during the chain (7) running, by the edges of the above-mentioned groove (5b) of the liftable track (5).

The lifting of the track (5) within the housing groove (2) occurs by
15 inflating the tube (4) situated below; figures 3 and 4 precisely show the elliptic shape of the tube section after inflation.

The lifting of each track (5) naturally provokes the increase in height of the forward motion of the chain (7) section that is running through the track itself (5), so that the higher semicircumference of the links set edgeways (7a)
20 now protrudes from the said slot (6) and actually interferes with the garment hooks (G) supported by the support and sliding line formed by the said strips (6), as shown more particularly in figure 4.

The lifting of this track (5) comes to a halt due to the presence of an opposed pair of teeth (2b) found on the inside of the said edges (2a) that
25 delimit the groove (2), in charge of cooperating with a corresponding pair of steps (5c) found on the sides of the said track (5), as shown in figure 4.

There is also an opposed pair of steps (2c) on the opposed sides of the said groove (2), whose function is to stop the descent of the slide (5) after the tube (4) situated above is deflated; this prevents the weight of the groove
30 itself (5) from resting directly on the tube (4), which is now deflated.

On the outside of the said support rail (1) is situated a longitudinal absorbing profile (8), with dimensions and distribution such as to soften the

possible impacts between the subvertical section of each hanger's hook (G) and the side of the support rail itself.

It has to be reminded that along the said support rail (1) of the system according to the invention, there are actually two or more of the said liftable
5 tracks (5) in conjunction with corresponding sections of inflatable tube (4).

This makes it possible to establish, along the whole system's line, areas in which the hanger hooks are drawn alternating with areas in which the drawing is not operational, depending on whether one or the other of the tracks is lifted or not (5); the aim is to organize in the most appropriate way
10 the management of the garment lots that have been created and unloaded by the system itself.

Although until this point this description has always referred to a system that holds in its support rail (1) a sequence of different liftable tracks (5), each one furnished with an inflatable tube below (4), there is no reason
15 not to carry out the same inventive idea using, as an alternative, a single continuous track (5) as long as the support rail itself (1).

In this case, the said continuous track is connected to the usual sequence of inflatable tubes (4) situated below, and is made of a slim and flexible structure, preferably in plastic; as the different tubes (4) situated
20 below are selectively being inflated, this track is able to bend upwards only on those specific sections where the tubes (4) that are actually inflated produce an upthrust.

The plant engineering necessary to establish the selective inflation or deflation of the different tubes (4) has deliberately been left out of this
25 description, being of a regular design.

It should finally be noted that although until this point this description has always referred to a chain (7) with alternate links, there is no reason not to use, as an alternative, also other drawing features that are able to function in the same way.

30 By way of an example, reference can be made to a toothed belt; in this case, the teeth could favourably interfere with the hanger hooks (G), whereas the grooves contained between two of these teeth could just as favourably

hold the hooks themselves (G) while they are being drawn forward.

Clearly, the possible choice of such a toothed belt would require the fixed tracks' (3a) profile and the liftable tracks' (5) profile, that are held in the said grooves (2, 3) of the box-shaped support structure (1), to be adapted.

Claims

- 1) Overhead transport system able to actuate the selective drawing of garment lots, characterized by the fact of making use of a support rail (1) into which is cut, on the top, a longitudinal groove (2), with a "U"-shaped section, for the purpose of holding on the bottom several means (4) that are capable of lifting one or more tracks (5), situated above, also in the said groove (2), in charge of containing and precisely guiding the forward motion of a drawing means that runs in a closed circuit (7) along the support rail (1), provided with a regular sequence of protruding features (7a) suited to delimit between them a sequence of hollows (7b) and therefore capable of interfering with the hooks (G) of the hangers hanging on the said support rail (1), at the very moment when the said appropriate means (4) enable the lifting, until a suitable stop point at the top, of the said track or tracks (5); besides, the said track or tracks (5) are also subject to a subsequent sliding downwards, until a stop point at the bottom, such as to remove the interference between the sections of the drawing features (7) and the hanger hooks themselves (G), as soon as the lifting means (4) situated below are deactivated.
- 2) System according to claim 1, characterized by the fact of having a sequence of liftable tracks (5) with a rigid structure, each one of them being associated with a lifting means (4) situated below.
- 3) System according to claim 1, characterized by the fact of having a single continuous liftable track (5), with a slim and flexible structure, associated with a sequence of lifting means (4) situated below.
- 4) System according to one or more of the above claims, characterized by the fact that the said means in charge of lifting the said track or tracks (5) are made of tube segments (4), of circular section, placed longitudinally on the bottom of the above-mentioned groove (2), suited for being inflated and then deflated in order to modify their section profile and therefore also the space they occupy in height; the said track or tracks (5) present a saddle (5a) below, which links up perfectly with the profile of the tube segments (4) situated below.

5) System according to one or more of the previous claims, characterized by the fact that the above-mentioned stop point at the top for the track or tracks (5) is represented by two teeth (2b), cut out in the opening of the said higher groove (2) of the support rail (1), suitable for interfering with two
5 corresponding steps (5c) placed near the top of each of the said tracks (5); whereas the above-mentioned stop point at the bottom for the same track or tracks (5), is represented by a pair of steps (5c) cut out on the opposed sides of the said groove (2).

6) System according to one or more of the previous claims, characterized by
10 the fact that the said support rail (1) presents a second longitudinal groove (3), totally closed and not communicating with the said groove (2) situated above, for the precise positioning of a fixed track (3), in charge of containing and guiding the forward motion of the above-mentioned drawing means (7) on its return trajectory, parallel to the "operational" trajectory which is
15 delimited and contained by the said liftable track or tracks (5) but in the other direction.

7) System according to one or more of the previous claims, characterized by the fact that the said support rail (1) presents at the top a rounded profile due to an opposed pair of identical strips (6) applied to the sides of the opening of
20 the said higher groove (2) of the support rail (1); that centrally delimit a longitudinal slot (6a) which is only slightly wider than the protruding features (7a) of the above-mentioned drawing feature (7).

8) System according to one or more of the previous claims, characterized by the fact that the said support rail (1) presents on the outside an longitudinal
25 absorbing profile (8) suitable for interfering with the subvertical section of the hanger hooks (G) hanging on the support rail itself (1).

9) System according to one or more of the previous claims, characterized by the fact that the said support rail (1) has, on the opposite side to the one where the above-mentioned absorbing profile is applied (8), some horizontal
30 plates (1a) for the connection to appropriate support means.

10) System according to one or more of the previous claims, characterized by the fact that the said closed circuit drawing feature consists of a chain (7) with

a regular sequence of links that are edgeways (7a) and links that are flat (7b).

11) System according to claim 8, characterized by the fact the the above-mentioned liftable track or tracks (5) and the above-mentioned fixed track (3a) bear grooves (5b, 3b) at the top, suited to contain exactly the lower
s semicircumferences of the links set edgeways (7a) of the above-mentioned chain (7).

12) System according to one or more of the previous claims, characterized by the fact that the said closed circuit drawing feature consists of a toothed belt.

1/1

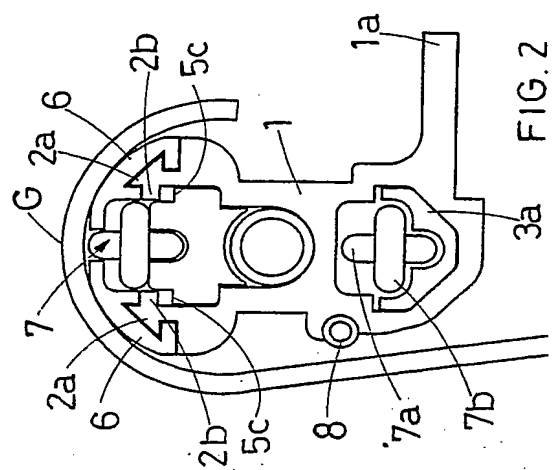


FIG. 2

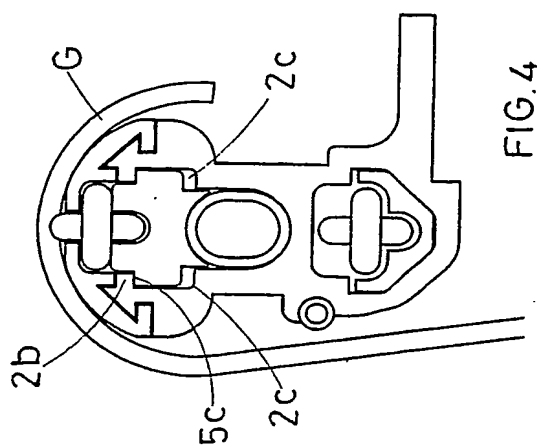


FIG. 4

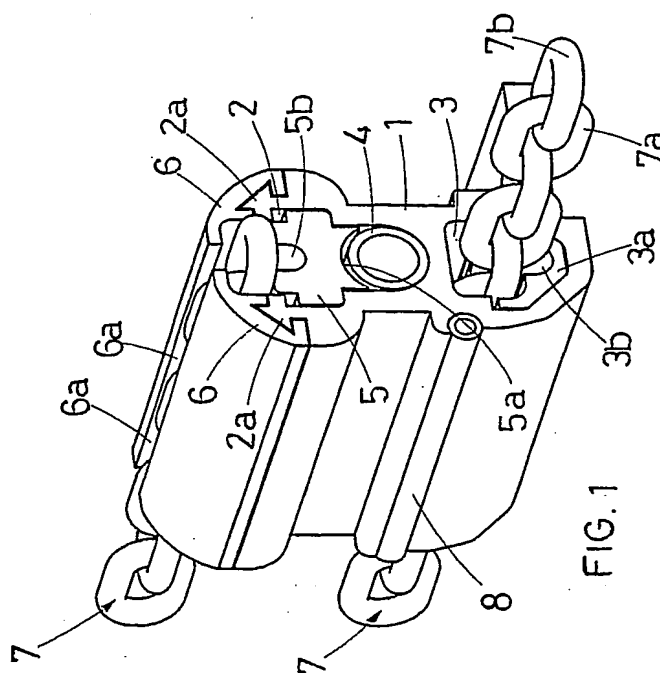


FIG. 1

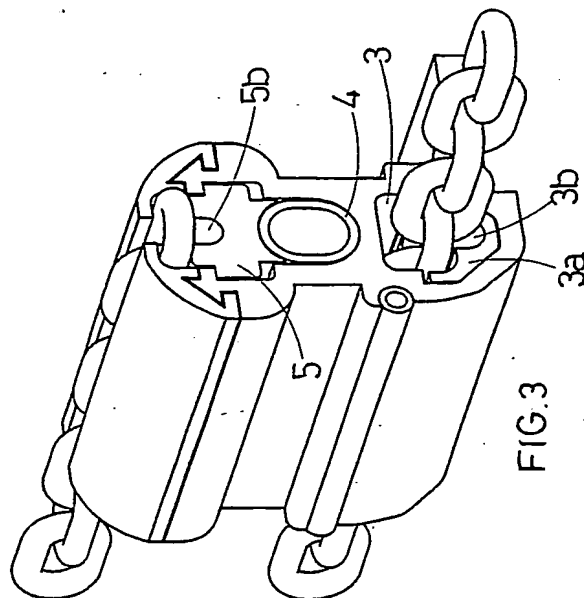


FIG. 3

ABSTRACT OF THE DISCLOSURE

Overhead transport system for the selective drawing of garment lots, making use of a box-shaped support rail (1) on which the garment hanger hooks (G) are hanging, inside which liftable tracks (5) are provided, through which a closed circuit chain (7) is guided. The chain being able to seize and draw the said hooks when the said liftable tracks are selectively push upwards due to the inflation of corresponding rubber tubes (4).

RMG/chb

P:\HOME\Clients\0030\0542\05303 PTO abstract.wpd